

CHAPTER 24

UPGRADE OF A COMPOSITE-STAR OPTICAL NETWORK

STEFANO SECCI¹ AND BRUNILDE SANSÒ²

¹*Dip. Elettronica e Informazione, Politecnico di Milano, and Dép. Informatique et Réseaux, ENST Paris, Address: ENST/INFRES, 37/39, rue Dareau, 75014 Paris, France, Email: secci@enst.fr – Tel: +33 (0)1 4581 8399*

²*GERAD and Dép. Génie électrique, Ecole Polytechnique de Montréal, Address: C.P.6079 succ Centre-Ville, Montréal, P.Q. CANADA H3C 3A7, Email: brunilde.sanso@polymtl.ca – Tel: +1 (514) 3406053*

Abstract: In this manuscript we tackle the optimal upgrade of an innovative optical transport network architecture called the Petaweb, which has a particular composite-star infrastructure that allows two-hop communications between edge nodes. Prior studies of the same authors have tackled the design and dimensioning problem for the Petaweb assuming TDM/WDM equipment and adopting a dedicated path protection strategy. A quasi-regular topology, more efficient than the regular, has also been proposed to minimize the quantity of fiber to install while preserving the regularity of the architecture. Exploiting the same network model, we propose an upgrade procedure for the extension of an existing optimized network, having one of the two possible topologies, under traffic increase and edge node addition

1. INTRODUCTION

With new and enhanced IP services that consume large amounts of bandwidth, the demand for optical transport services increases day by day. There is an important need for a smooth and cost-effective way to upgrade WDM networks. Such an upgrade is not an easy task given the network structure. For instance, in WDM mesh networks the use of the idle capacity by multi-hop lightpaths is complicated by the need of re-dimensioning core nodes, resizing transport links and reconfiguring a large number of optical switches.

In [1] a novel optical architecture called the Petaweb was proposed for the next generation transport infrastructure. This network is formed by edge nodes connected through core nodes as shown in Fig. 1. Every edge node is connected to every core node. Note that the core nodes are not connected to each other, forming a backbone network where all the nodes are disconnected. Given its topology, the

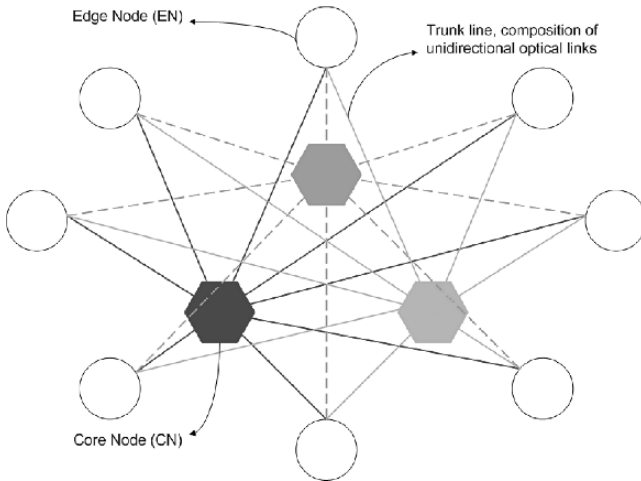


Figure 1. The Petaweb composite-star architecture

Petaweb allows for two-hop optical lightpaths between two edge nodes through a single core node.

In this architecture the classical pitfalls of the WDM network upgrades where existing network capacity may not be available because of structural bottlenecks can now be avoided. In fact, the Petaweb offers few easily-manageable and independently-configured core nodes and all its components are modular and can be extended without reconfiguring the existing equipment [2]. Moreover, given the regularity of the structure, an upgrade will not jeopardize the management of an optimized network as idle capacity can be easily allocated without compromising network management.

In previous work, we have dealt with the design and dimensioning of the Petaweb structure. In [3] the design problem was defined and an efficient resolution approach was presented. In [4] the TDM/WDM features of the Petaweb were investigated and a new design optimization was proposed. In that paper, a quasi-regular topology for the Petaweb was also introduced. Although the quasi-regular topology has a lower cost when compared to the regular one, it has the disadvantage that in the event of failures, some minor edge nodes could get disconnected. Then, the reliability issues were dealt with in [5].

Now, once the Petaweb network is designed, the question remains on how to upgrade the structure taking into account the architectural constraints. The object of this paper is precisely to tackle this issue and to present an effective formulation and resolution approach. The paper is divided as follows. In Sect. 2 the Petaweb architecture is briefly discussed. For the sake of completeness, the network model and the design problem illustrated in [4] and [5] are also presented. In Sect. 3 other network expansion problems tackled in the literature are briefly reviewed. The problem of upgrading a Petaweb architecture is presented in Sect. 4 where

an Integer Linear Programming (ILP) formulation is proposed. Sect. 5 shows the results for two cases: the case for which there is only a traffic increase, and the case for which there is traffic increase and edge node addition. Sect. 6 is devoted to conclusions and suggestions for further work.

2. THE PETAWEB NETWORK MODEL

In the Petaweb, an *edge node* (EN) is an electronic node that requests bandwidth to the transport network. The connection between N edge nodes and a core node is shown in Fig. 2. Every edge node is connected to a core node through one *optical link*, composed of one or more optical fibers. We suppose unidirectional optical fibers so that an edge node has one optical link incoming from, and one optical link outgoing to, every core node. Every fiber has several optical channels and we assume that all fibers of the network carry the same number of channels.

A *core node* (CN) is a set of arrays of parallel space switches, also called switching planes. The number of switching planes s_r identifies the type r of a CN (indicated by CN- r). Note that the optical link connecting an EN to a CN- r has s_r unidirectional optical fibers, one for every switching plane. In this work, we assume three types of core nodes, with one, two and four switching planes, that is, $s_1 = 1$, $s_2 = 2$ and $s_3 = 4$. All the incoming WDM fibers are demultiplexed into their different lambda-channels, each of which is connected to the space switch of the respective array. conversion so that the Petaweb can be considered an all-optical network. Each space switch handles channels of the same wavelength; those referred to the same EN are then multiplexed into the optical link going back to that EN. Such a parallel-planes structure increases the reliability of the CNs because a hypothetical failure in a switching plane would affect only the connections on

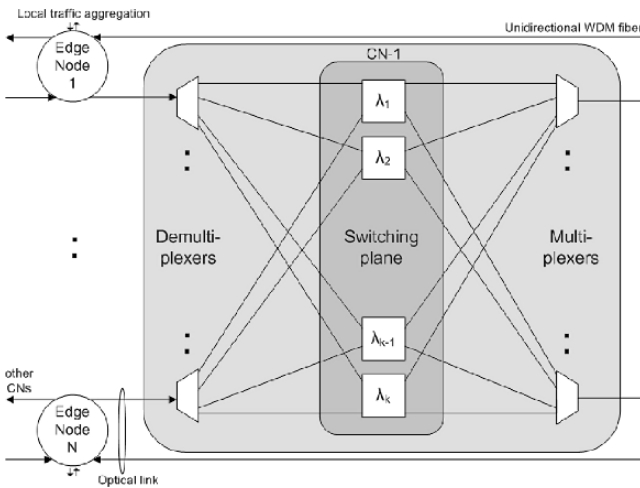


Figure 2. Parallel-planes optical core node in the Petaweb

that plane. In [2] Blouin proposed the use of TDM in the Petaweb to produce sub-channels within a wavelength channel. To integrate Time Division Multiplexing into the Petaweb, the switching cores functionalities must be specified. In [4] we proposed the replacement of the switching plane described with the compatible all-optical TDM Wavelength Space Routers of Huang [6], which multiplexes in a time-slot basis remaining in the optical domain and without any buffering operation; the behavior of such a node architecture has been recently evaluated in [7]. The EN locations define the set of potential *switching sites*. Note that several CNs can be installed in the same site. Therefore, the physical connection between an EN and a switching site can be composed of several links, given that there may be several CNs present at the site. From now on we call this physical connection an *optical trunk line*.

In [4] and [5], two possible topologies were studied. The regular and the quasi-regular topology. In the regular topology every switching plane is connected with every edge node, and no wavelength conversion is required at core nodes. The quasi-regular topology is built removing from the regular architecture the equipment that will remain unused in the dimensioned network, and require wavelength converters.

We will refer in the following to a time-slotted lightpath with the term *ts-lightpath* (as suggested in [6]) or with the acronym TLP; it is the data channel of a time-slot in a wavelength. Let us now indicate by Z_h the transport capacity of a TLP of class h and let C_{ch} be the capacity of a lambda-channel set to 10 Gbps. We also assume that there are $W = 16$ wavelengths per fiber. Then, we have $Z_2 = 10$ Gb/s, $Z_3 = 160$ Gb/s and $Z_1 = 0.625$ Gb/s [4]. Note that these bit-rate classes were chosen so that a perfect correspondence with the bit-rates of SDH and OTN interfaces is obtained [8].

To optimize the Petaweb design, a total network cost must be minimized. In our model such a cost is composed of three elements: the cost of the core node, the cost of the fiber and an additional cost to take into account the propagation delay. The *cost of the core nodes* is composed of a fixed cost f_r that depends on the type r of core and that is defined so that $f_r > f_{r-1} > \dots > f_1$. The number of switching planes is such that $s_r = 2s_{r-1}$. An active port has a cost P scaled for higher types. Let us indicate by M the set of edge node sites; $|M|$ is thus the number of edge nodes of the network. Let γ be the scale factor for P , then the global cost of a core node of type r is $K_r = f_r + 2|M|W s_r P \gamma^{(s_r-1)}$, with $K_r < 2K_{r-1}$. The *fiber cost* is indicated as F and is in unit of length. It is the cost of a reference fiber type, which is then scaled by a discrete function $\phi(W)$ that depends on the number of wavelengths. Let us indicate by Δ_{ij} the distance between the sites i and j ; the installation of a CN- r on site i requires the installation of s_r fibers per direction for every edge node, which yields a global cost of $F_{i,r} = 2\phi(W)F s_r \sum_j \Delta_{ij}$.

Since in [1] the authors highlighted that a drawback of the Petaweb network may be a larger propagation delay for some connections, we decided to account it as a virtual cost of the network cost to minimize. Indeed, with proper design the traffic weighted propagation delay may be smaller than that of conventional networks. The *propagation delay cost*, indicated by β , is proportional to the distance traveled and

to the lightpath bit-rate. This is an interesting addition to the classical equipment cost functions to guarantee that the solution is such that the connections between edge nodes that have the largest exchange of traffic experience as low a propagation time as possible.

The Petaweb design must respect the physical characteristics of network components. Capacity constraints concern edge nodes and optical links. The capacities can be allocated and increased only through discrete quantities: the link capacity can be increased by a multiple of the capacity of W lambda-channels at a time; the capacity of an EN depends on the number of optical fibers connected to it. Furthermore, to control the delay in buffering operations, all the TLPs of a Connection Request (CR) must be transported on the same optical trunk line, all the time-slots associated to a TLP must be transported on the same optical link, and all the TLPs of a CR must be transported contiguously in the time and in the frequency domains.

The design problem consists in finding the best composite-star physical topology for the given set of TLPs and in assigning to the TLPs their communications medium (wavelengths and time-slots). Hence it is jointly an optimal dimensioning and a resource assignment problem. It is divided into two sub-problems: Route and Fiber Allocation (RFA) problem, which treats the allocation of the resources guaranteeing an efficient routing, and the Wavelength and Time-slot Assignment (WTA) problem, which concerns the assignment of the allocated resources. The RFA problem gives rise to an ILP formulation that is solved with CPLEX, or with a specialized heuristic [3]. For the WTA problem a straightforward algorithm was devised in [4] and [5]. It assigns time-slots, wavelengths and fibers to TLPs starting from the solution of the resource allocation: each TLP-1 has one time-slot assigned, each TLP-2 one wavelength and each TLP-3 one fiber. The TLPs related to the same connection request have assigned contiguous time-slots and wavelengths, when possible. An example of the WTA solution is given in Section 5.4. A variant of the Petaweb design was recently presented in [5] where a Dedicated Path Protection (DPP) strategy was added to the network model proposed in [4] to tackle reliability issues. The idea is that for every working TLP (wTLP) a protection link-disjoint TLP (pTLP) is allocated [9]. Thus, in case of one trunk line failure all the wTLPs are recovered from the allocated pTLPs without an excessive signaling interruptions. In the 1+1 DPP case there would not be a signaling phase. In case of 1:1 DPP it makes sense to enable a shorter path for w-LPs, and a longer path to pTLPs to be used in case of failure along the working one. For this reason the optimization problem should give priority to wTLPs in the contention for short paths. The DPP strategy requires an additional constraint to allow the protection mechanism: every pTLP must be multiplexed on trunk lines different from those of the corresponding wTLP; in the Petaweb architecture this means that a pTLP must be switched to a different network site than that of its wTLP. Note that this constraint guarantees even the node protection since if a core node or part of it fails, all the affected paths can be restored by the receivers.

In this paper it is assumed that the Petaweb networks to be upgraded were first optimized using the DPP policy. To illustrate the differences in the architecture, we refer the reader to the following figures. Fig. 3a shows a 10-node quasi-regular

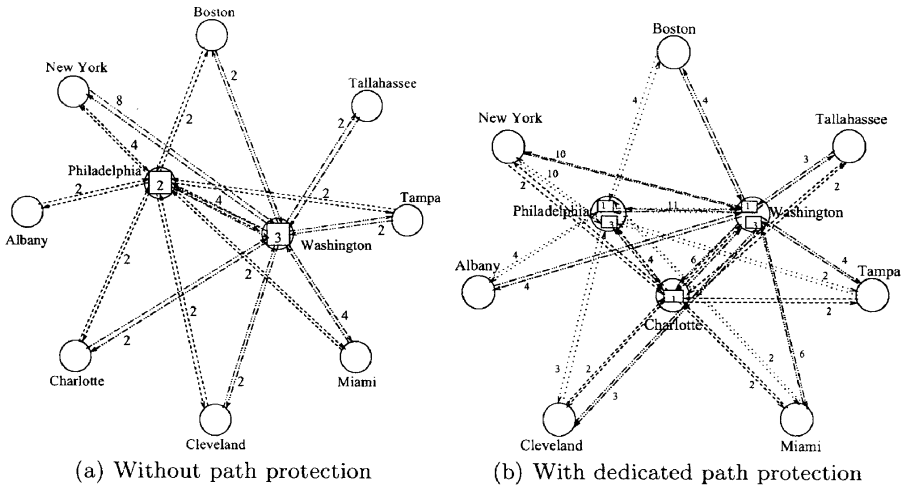


Figure 3. Optimized 10-node Petaweb. The numbers on the links represent the number of fibers per line

topology optimized without path protection [4] and Fig. 3b¹ shows the case with DPP [5]: one can notice that in the first case many edge nodes are connected to the network through only one trunk line whereas this does not happen in the second case when, instead, there is a larger quantity of fibers to install. Therefore, the path protection method produced a survivable quasi-regular Petaweb architecture.

3. REVIEWING UPDATE AND UPGRADE PROBLEMS

An increase in traffic volume imposes changes in the network configuration; there are two ways to face such an increase: by updating or by upgrading the network.

Updating a transport network means configuring new circuits to further exploit the available equipment and resources; in that case, a reconfiguration of the network virtual topology may be useful to free more resources via re-optimization and hence postponing network upgrades [10]. For example, in [11] the authors tackled the problem of accommodating an expansion of the original traffic matrix for a pre-optimized WDM mesh network with the restriction that no more physical equipment should be added to the existing infrastructure, and that only the existing idle capacity could be exploited without touching active lightpaths.

Upgrading a network means resizing its infrastructure and, optionally, reconfiguring its routes. An upgrade may require removal and/or addition of new equipment to satisfy a set of new end-to-end requests. In [12] the upgrade design problem for WDM mesh networks is solved through a methodology that exploits the idle

¹ The trunk lines connecting two switching sites are not link between core nodes, but links between edge node and core nodes, and vice-versa

capacity of an optimized network adding more resources if the idle ones are not enough. They do not consider reconfiguring the original connections.

In this article, we focus on the upgrade of the Petaweb architecture without reconfiguration; in an edge-controlled transport network, such as the Petaweb, the reconfiguration of the lightpaths routing would imply high data flows interruption for a significant gap of time. Moreover, the re-optimization of active lightpaths becomes no more an essential operation for this composite-star architecture because all the idle capacity is directly exploitable, differently than with meshed WDM networks. Another feature not explicitly taken into account in our model is the equipment removal. Even though that might be considered in some networks [13], it is not a real option in nationwide optical transport networks. In any case, this is a feature that can be easily incorporated into the model that we present in the next Section.

4. PETAWEB UPGRADE

The proposed upgrade model for the Petaweb not only considers the addition of new core node and fiber equipment, but also the exploitation of the idle capacity that is present in the initial architecture. In fact, in [5] we found that optimized survivable Petaweb networks still present a significant amount of idle capacity, which remains then available to accommodate subsequent bandwidth requests.

When the traffic volumes or the number of the connection requests between the existing edge nodes increase, they need new TLPs for which a route through a core node has to be decided. Thus, some switching sites that had few or low bit-rate Connection Requests, may now be updated with more core nodes, optical fibers and links. New switching sites may also be opened. In this work, we also consider that new edge nodes can be added to the network, which could imply that the opening of new switching sites is even more likely.

As previously stated, equipment removal is not considered in our update model. Therefore, the *upgrade cost* only includes the cost of the *new equipments* (i.e. fibers, core nodes and ports) and a propagation delay cost of the *new TLPs*. This latest term is added to make sure that the new TLPs are not routed on paths that will produce too long propagation delays.

The logic of the update model is to keep the initial Petaweb topology, whether it is regular or quasi-regular. Moreover, it is assumed that the existing optimized network was designed with a survivable strategy (DPP model) that is kept after the upgrade. Since we assume that existing core nodes and fibers cannot be removed, and that the number of new TLPs are likely to be fewer than the existing ones, the complexity of the upgrade problem is reasonably lower than that of the initial planning problem [4].

The logic of the upgrade model is to use the same type of objectives and constraints of [5] but forcing the design to keep the existing equipment, and altering the available capacity on each single link so that the media already in use is not considered to route the new traffic.

Table 1. Notations

M	set of sites
T	set of pairs of sites ($M \times M$), $p \in T$ is a Connection Request
O_j	a subset of T with a fixed origin site j
D_k	a subset of T with a fixed destination site k
V	set of types of core nodes
E_r	number of CN- r specimens that can be enabled in a site
(i, r, e)	triple representing a CN specimen, $i \in M, r \in V, 1 \leq e \leq E_r$
C_j	capacity, in Gb/s, of the edge node in site $j, j \in M$
H	set of TLPs classes
L_h	maximal number of TLP- h specimens for a CR, $h \in H$
(p, h, l)	triple representing a TLP specimen, $p \in T, h \in H, 1 \leq l \leq L_h$
d_{ip}	distance traveled going from the origin j to the destination k of the CR p passing by the site i : $d_{ip} = \Delta_{ij} + \Delta_{ik}$
y_{ire}	indicates if the e th CN- r specimen is enabled in the site i
x_{phl}^{ire}	indicates if l th TLP- h of CR p exists and is switched by the CN (i, r, e)
$(p, h, l + L_h)$	triple identifying uniquely the pTLP of the wTLP (p, h, l)
δ	weigh to give to the propagation delay cost of pTLPs, $0 \leq \delta \leq 1$
Ω_w	set of all wTLPs, $p \in T, h \in H$ and $0 < l \leq L_h$
Ω_p	set of all pTLPs, $L_h < l \leq 2L_h$
Ω	set of all TLPs, $0 < l \leq 2L_h$
χ	set of core nodes of the existing optimized network
Q_j^{ire}	pre-used capacity from site j to the existing CN (i, r, e) if $(i, r, e) \in \chi$
Q_{ire}^k	pre-used capacity from the existing CN (i, r, e) to site k if $(i, r, e) \in \chi$

The existing network is identified by all the enabled core nodes, the set of TLPs they commute, and by the number of fibers per optical link. From these, the used and the available transport capacity can be extracted and considered in the capacity constraints. Regarding the objective, it is worth noting that the optimization will be carried aiming at the minimization of the current total equipment costs. Thus, to assess the cost of the update, the cost of the equipment already installed will be subtracted.

The set of new TLPs (p, h, l) identifies the additional traffic volume, and the set M comprehends the pre-existing ENs sites and the new ones, if any. Thus, the solution is an optimized network with a regular or a quasi-regular topology, it indicates where the new TLPs must be routed and the equipment that have to be installed to satisfy the additional traffic. The mathematical formulation of the problem is the following. Additional notations are displayed in Table 1.

$$\begin{aligned}
 \min G(\bar{y}, \bar{x}) &= \sum_{(i,r,e)} (K_r + F_{i,r}) y_{ire} \\
 (1) \quad &+ \sum_{(i,r,e)} \sum_{(p,h,l) \in \Omega_w} \beta d_{ip} Z_h x_{phl}^{ire} + \sum_{(i,r,e)} \sum_{(p,h,l) \in \Omega_p} \delta \beta d_{ip} Z_h x_{phl}^{ire} \\
 (2) \quad &s.t. \quad y_{ire} = 1 \quad \forall (i, r, e) \in \chi
 \end{aligned}$$

- $$(3) \quad \sum_{r \in V} \sum_{e=1}^{E_r} x_{phl}^{ire} + \sum_{r \in V} \sum_{e=1}^{E_r} x_{phl_p}^{ire} \leq 1 \quad \forall i \in M, \forall (p, h, l) \in \Omega_w, l_p = l + L_h$$
- $$(4) \quad \sum_{(i,r,e)} x_{phl}^{ire} = 1 \quad \forall (p, h, l) \in \Omega$$
- $$(5) \quad \sum_{(i,r,e)} C_{ch} W_{s_r} y_{ire} \leq C_j \quad \forall j \in M$$
- $$(6) \quad \sum_{(p \in O_j, h, l) \in \Omega} Z_h x_{phl}^{ire} \leq (C_{ch} W_{s_r} - Q_j^{ire}) y_{ire} \quad \forall j \in M, \forall (i, r, e)$$
- $$(7) \quad \sum_{(p \in D_k, h, l) \in \Omega} Z_h x_{phl}^{ire} \leq (C_{ch} W_{s_r} - Q_{ire}^k) y_{ire} \quad \forall k \in M, \forall (i, r, e)$$
- $$(8) \quad x_{phl}^{ire} \in \{0, 1\}, \quad y_{ire} \in \{0, 1\}$$

The objective (1) includes the cost of switches and fiber plus two cost terms to account for propagation delay: one for the pTLPs and one for the wTLPs. Note that the two terms are ponderated differently to avoid that the pTLP and its corresponding wTLP contend for the same shortest path. (2) enforces the enabling of the existing core nodes; (3) is the protection constraint; (4) ensures that a TLP must be switched only by one CN; (5) enforces EN capacity constraint; (6) and (7) enforce the capacity constraints on the idle capacity for the optical links going from every core node and every edge node, and vice versa, subtracting the already occupied transport capacity; (8) defines the binary domain of the variables.

As it was already mentioned, the upgrade cost is obtained subtracting from the final objective value the equivalent cost of the pre-existing network. Also mentioned was the fact that the upgrade aims at a regular topology. Then if the initial topology was quasi-regular and the planner intends the update to keep a quasi-regular structure, the quasi-regular topology can be extracted from the regular one.

To extract the quasi-regular topology one proceeds taking into account every optical link in the optimized regular network, looking for how much of its fibers would be used by the TLPs routed there, and disabling those fibers that would not be used at all. So, a whole optical link may be disabled in the quasi-regular topology, and, also, a whole trunk line may be disabled [4] (e.g. see Fig. 3). Moreover, even the ports associated to the disabled fibers are not considered in the quasi-regular architecture. Hence the cost reduction concerns the cost of unused fibers and ports. Note that the TLPs remain associated to the same core node than in the regular topology and that the routes are not affected by the disabling of fibers and ports.

5. UPGRADE RESULTS

The initial network status is defined by the 10-node networks dimensioned in [5]. We consider two scenarios: simple traffic increase and traffic increase with edge node additions. Moreover, we consider two types of traffic matrixes: **A** matrixes

contain industrial traffic data, with many zero values; \mathbf{B} matrixes are dense and are obtained from the well known gravity model, used for example in [14]. An element of a traffic matrix is a CR of an origin-destination pair, which is accommodated in the physical topology using one or more TLPs. The choice of parameters is: $E_1 = 1$, $E_2 = 1$, $E_3 = 4$, $\gamma = 0.95$, $P/F = 150$, $\beta/F = 0.1 [Km Gb/s]^{-1}$, $f_1/F = 20$, $f_2/F = 50$, $f_3/F = 100$, $C_j = 2000 Gb/s$, $L_1 = L_2 = 12$, $L_3 = 20$, $\delta = 0.9$. The CPLEX MIPGAP was set to 0.1%. We employed $\phi(W) = W$ considering that the cost of a fiber is proportional to the number of wavelengths. Other functions can also be considered. The simulations ran on a CPU AMD Opteron 64bit 2.4Ghz, 1MB cache, 16GB RAM.

5.1. Traffic Increase

In this study case the traffic of every existing Connection Request is increased by 200%. The left side of Table 2 reports the upgrade results obtained solving the formulation (1)–(8) for the 10A and the 10B pre-planned network with regular and quasi-regular topologies.

The results show that the network utilization μ_R , defined as the ratio between the used and the available capacities, increases for both topologies as illustrated in Fig. 4 (data extracted from [5]). Such an increase is more important for the regular topology. This is due to the equipment already installed that allow the new TLPs to be routed more efficiently than with the quasi-regular topology. This behavior seems to be confirmed by the average path length (weighted on the traffic unit), indicated by ν in Table 2; it is slightly bigger with quasi-regular topologies. This

Table 2. Upgrade solutions

	traffic increase				traffic increase and nodes addition			
	regular topology		quasi-reg. top.		regular topology		quasi-reg. top.	
Model	10A	10B	10A	10B	10A	10B	10A	10B
cost	856983	975431	1304076	717565	4817336	3471536	2984283	1670231
upgrade cost distribution								
fiber	35.7%	74.9%	52.3%	69.6%	73.1%	32.2%	60.2%	75.0%
CN	5.7%	10.7%	6.3%	11.2%	8.8%	2.7%	8.9%	9.7%
delay	58.6%	14.4%	41.4%	19.2%	18.1%	65.1%	30.9%	15.3%
global cost distribution								
fiber	70.9%	80.9%	60.8%	71.1%	75.4%	82.7%	62.6%	73.3%
CN	10.2%	11.6%	10.0%	13.4%	9.9%	10.7%	10.3%	12.1%
delay	18.9%	7.4%	29.2%	15.5%	14.7%	6.5%	27.0%	14.6%
μ_R	31.6%	22.4%	54.1%	45.6%	26.9%	17.5%	51.7%	38.3%
ν	2924	894	2953	911	1719	1151	1717	1138
time (s)	1.3	23.9	1.2	36.2	1269	128	1178	86

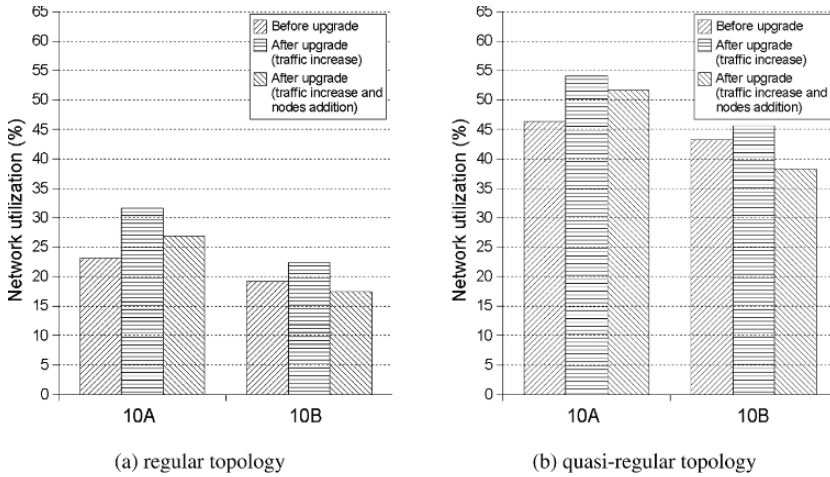


Figure 4. Network utilization before and after the 10A upgrade

seems to indicate that, if a network operator foresees to make regular upgrades of its network and want to route its TLPs in the most effective way, the cost to pay is the initial regularity.

For example, for the 10A model, the added traffic amount exploits mainly the idle capacity without enabling lots of new switching planes; indeed, the network utilization (μ_R) went from 23.19% and 46.39% (data extracted from the solutions in [5]) to 31.6% and 54.1%, and the weight of the fiber cost felt of 5–7 percentage points (as depicted in Fig. 5). In this case one can notice how the upgrade cost is bigger for a quasi-regular topology than for a regular topology; in the first case one has to install fibers that, instead, with a correspondent regular topology may have already been installed.

In Table 2 the cost distribution concerning only upgrade costs and the one concerning the whole network equipments (those installed before the upgrade together with those installed after) are portrayed. For comparison purposes the global cost distribution before [5] and after the upgrade for the 10A case are illustrated in Fig. 5. We can see that the most remarkable effect of the new TLPs and subsequent network upgrade is an increase of the weight of the cost due to propagation delays and, thus, a decrease of the fibers cost and of the core node cost weights. The upgrade cost fraction due to new fibers and core nodes is minor if compared to the one related to the whole network; on the contrary, the upgrade fraction due to the delay of the new TLPs is significantly bigger than the one related to the whole network. This confirms that the upgrade tends to exploit the existing resources rather than requiring new ones. And the difference is more evident for the upgrade of a quasi-regular topology, because the existing fibers are better exploited, and, even if new fibers are placed, the overall fibers cost weight still decreases.

5.2. Traffic Increase and Edge Nodes Addition

In this study case we increased of 200% the existing Connection Requests, and we added 4 ENs to the existing ones (the Connection Requests of the added ENs are extracted from the 34A and 34B matrixes used in [5]). The right side of Table 2 displays the upgrade results obtained for 10A and 10B with, respectively, regular and quasi-regular topologies. The resulting networks are composed of 14 ENs. As expected, the addition of new ENs causes a large upgrade cost because of the new trunk lines that are needed to connect the new ENs to at least two CNs (because of the DPP constraint). Fig. 5 shows how the equipment cost weights are still smaller than the correspondent value for the pre-existing network, but, in the case of the fiber cost, slightly higher than the value for the case with only traffic increase. Fig. 4 reflects that under EN addition the overall network utilization may decrease, as it happens for the 10B case; indeed, the new installed trunk lines are under-used with respect to the old ones that were better exploited.

Observing the upgrade cost in the two cases we notice that it is lower for an existing quasi-regular topology. When new edge nodes are added to the network, they can be integrated installing new equipment, mainly new optical links. And with quasi-regular topologies these new optical links are composed only of the essential number of fibers, and nothing more. We can conclude that the upgrade with ENs addition is more convenient if one adopts a quasi-regular topology; the cost gain is significant and the network operator may prefer to start with a quasi-regular topology and to upgrade it only in case of new ENs addition. Until new ENs have to be added, it may be possible to accommodate increases of traffic only exploiting the present idle capacity, without additional physical equipments, i.e. through updates (see section 3); this update method may be a subject for further work (similar to the method used in [11] for mesh networks).

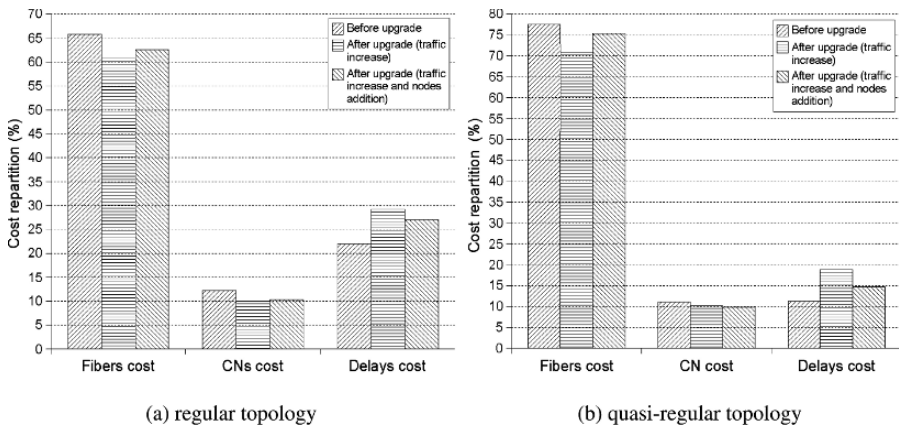


Figure 5. Cost distribution before and after the 10A upgrade

5.3. Comparison with a Greedy Upgrade

In this section we comment on the results obtained applying an upgrade method based on a straightforward greedy strategy when compared with the results obtained with the method proposed in this paper. The greedy upgrade can be described as follows: when a new TLP is created, it is switched to the closest switching site with core nodes already installed. Then the two trunk lines supposed to route the TLP may be opportunely resized and new core nodes may be installed at that site. Note that the edge node capacity constraint (5) may not be respected for regular topologies. In such a case, the edge node should be replaced.

We analyze the results for the two study cases 5.1 and 5.2. The behavior of the greedy method is the same for an existing regular or quasi-regular architecture. In either case, the resulting network is suboptimal as can be seen in Table 3 where the gaps with respect to the optimal solution given by the upgrade are depicted. It can be seen that the greedy update may yield a solution costing twice as much as a solution produced by the optimized procedure. Interestingly, the worst differences are produced with the 10A matrices.

In the 10B cases the upgrade cost is not too large compared with the previous values; only one new switching plane was required. But, along with the 10A cases, we can see the worst values of fiber cost and network utilization: the route for TLPs was not carefully chosen. In terms of average path length, the greedy method gives better values than the optimal method, this can be seen by the gaps with

Table 3. Greedy upgrade solutions

	traffic increase				traffic increase and nodes addition			
	regular topology		quasi-reg. top.		regular topology		quasi-reg. top.	
Model	10A	10B	10A	10B	10A	10B	10A	10B
Cost	1874996	999035	1369553	1029584	6894998	3551366	3278257	1791541
gap	+118%	+2%	+5%	+43%	+43%	+2%	+9%	+7%
upgrade cost distribution								
fiber	69.2%	75.6%	43.2%	66.7%	76.5%	83.9%	60.8%	69.8%
CN	10.1%	11.3%	5.8%	12.7%	9.6%	9.4%	8.7%	10.7%
delay	20.7%	13.1%	51.0%	20.6%	13.9%	6.7%	30.5%	19.5%
global cost distribution								
fiber	75.3%	81.0%	63.7%	69.9%	77.1%	83.0%	62.8%	70.9%
CN	10.8%	11.7%	10.9%	13.7%	10.2%	10.7%	10.1%	12.5%
delay	13.8%	7.3%	25.4%	16.5%	12.7%	6.3%	27.1%	16.6%
μ_R	24%	21.5%	49.1%	47%	20.5%	16.7%	50.4%	42.6%
ν	2375	871	2375	871	1798	1074	1798	1074
gap	-23%	-2.6%	-24%	-4.5%	+4.6%	-7%	+4.7%	-5.9%

respect to the optimal solutions that are negative in almost all the instances. Clearly, plugging the new connections to the closer core nodes produces an improvement in overall path length, but this is often a more expensive choice with respect to the cost model. The upgrade cost distribution has a behavior very close to that of the global cost distribution: the greedy method can not profit efficiently of the available resources.

5.4. WTA Results

The dimensioning phase presented in the previous sections provides the equipment to be installed and the switching node assigned to each TLP. The next phase to complete the design is to apply the WTA algorithm [4] that allocates transport units (time-slots, wavelengths and fibers) to every new TLP. In this section the allocation of resources for the study case in 5 are illustrated, considering, for sake of simplicity, only the outgoing fibers of the EN in Tallahassee (the one connected by two trunk lines in Fig. 3b).

Let us concentrate on node 9. Before the update, the node had three TLP-1 for $CR_{9,8}$ and one TLP-1 for $CR_{9,10}$ opportunely protected as reported in Fig.6a from [5]. After the upgrade, the volume of the pre-existing CRs of node 9 increased and the additional traffic has to be served by nine more TLP-1, six for $CR_{9,8}$ and three for $CR_{9,10}$. Moreover, a new EN is added in the Chicago site (site 13) and the new $CR_{9,13}$ has to be served by two TLP-1.

Figure 6 illustrates the routing and the assignment of the new TLPs. As it can be noticed, the TLPs of the $CR_{9,8}$ and $CR_{9,10}$, as well as the pTLPs of the $CR_{9,13}$, occupy the free time-slots on the already installed fibers. The wTLPs of $CR_{9,13}$ are switched in a CN in site 4 and transported on the first two time-slots of the first wavelength on the only fiber connecting the EN-9 to the switching site 4. Consequently, the utilization of the pre-existing fibers increases, while the utilization of the new fiber between 9 and 4 remains reasonably low.

6. CONCLUSIONS

In this paper, a formulation and a resolution approach for the Petaweb upgrade problem were presented for the first time. The analysis shows the scalability qualities of the Petaweb architecture. On the basis of the shown results, it can be concluded that a regular topology is advisable if the network operator has a good initial budget and if frequent upgrades are foreseen; a quasi-regular topology is the best choice in case of low budget and rare upgrades, especially when the upgrade contemplates edge nodes addition.

The proposed method underlined the importance of conducting a cost-effective upgrade when compared with the common practical paradigm “plug where it is closer”, often used in the industry; indeed, such greedy upgrade provisioning method applied to the Petaweb architecture can bring a lower network utilization at significantly higher cost.

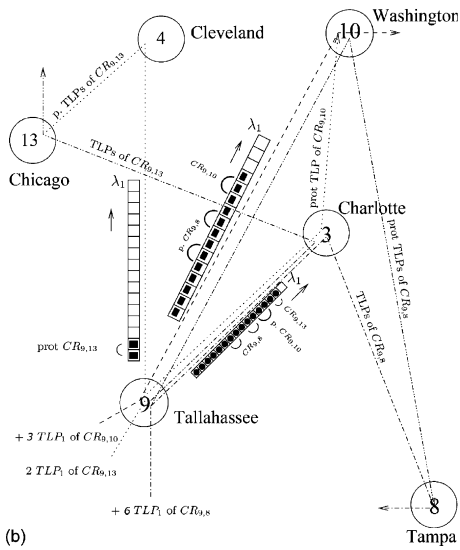
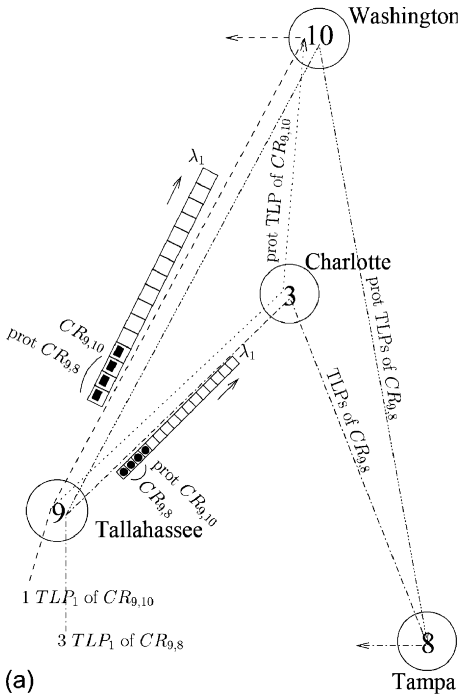


Figure 6. WTA results before (a) and after (b) the upgrade. 5.2 case (10A)

REFERENCES

1. R. Vickers, M. Beshai, "Petaweb architecture", presented at *Networks 2000: 9th Int. Tel. Network Planning Symposium*, Toronto (2000).
2. F. J. Blouin, A. W. Lee, A. J. Lee, M. Beshai, "A comparison of two optical-core networks", *J. Opt. Netw.* 1, 56–65 (2001).
3. A. Reinert, B. Sansò, S. Secci, "Design Optimization of the Petaweb Architecture", GERAD 2004–87, submitted to *IEEE Transactions on Networking*.
4. S. Secci, B. Sansò, "Design and dimensioning of a novel composite-star WDM network with TDM channel partitioning", in *Proc. of IEEE Broadnets '06*.
5. S. Secci, B. Sansò, "Optimization of a dedicated path protected TDM/WDM Petaweb architecture", in *Proc. of IFIP/INFORMS NAEC 2006*.
6. N. F. Huang, G. H. Liaw, C. P. Wang, "A novel all-optical transport network with time-shared wavelength channels", *J. Sel. Areas Comm.* 18, 1863–1875 (2000).
7. Y. C. Huei, P. H. Keng, "Framework for shared time-slot TDM wavelength optical WDM networks", *J. Opt. Netw.* 5, 554–567 (2006).
8. "Interfaces for the Optical Transport Networks (OTN)", G.709/Y.1331, ITU-T International Communication Union, Mar. 2003.
9. G. Maier et al., "Optical network survivability: protection techniques in the WDM layer", *Photonic Network Communications* 4, no. 3/4, 251–269 (2002).
10. Lu Shen et al., "A load-balancing shared-protection-path reconfiguration approach in WDM wavelength-routed networks", in *Proc. of OFC 2004*.
11. L. Barbato, G. Maier, A. Pattavina, "Maximum traffic scaling in WDM networks optimized for an initial static load", in *Proc. of ONDM 2003*.
12. Y. Jintae, I. Yamashita, S. Seikai, K. Kitayama, "Upgrade design of survivable wavelength-routed networks for increase of traffic loads", *Proc. of ONDM'05*.
13. S. Chamberland, B. Sansò, "Update of two-level networks with modular switches", *International Teletraffic Congress*, pp. 1009-1018 (1999).
14. S. Secci, M. Tornatore, A. Pattavina, "Optimal Design for Survivable Backbones with End-to-End and Subpath Wavebanding", *J. Opt. Netw.*, Vol.6, no. 1 (2007).